


SOLENOID VALVE NAMUR 5/2, 2 coil G 1/4"

Description



- solenoid valve 5/2, 2 coil
- connection acc. to NAMUR
- machanical control

Technical parametres

- Standard coil voltage
12V =
24V =
48V =
24V / 50Hz
110V / 50Hz
230V / 50Hz

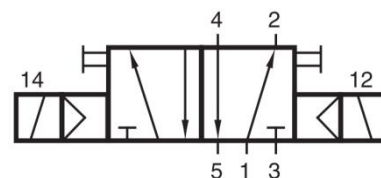

MNH 520 701
MNH 520 701 NPT
MNH 520 121
MNH 520 121 NPT

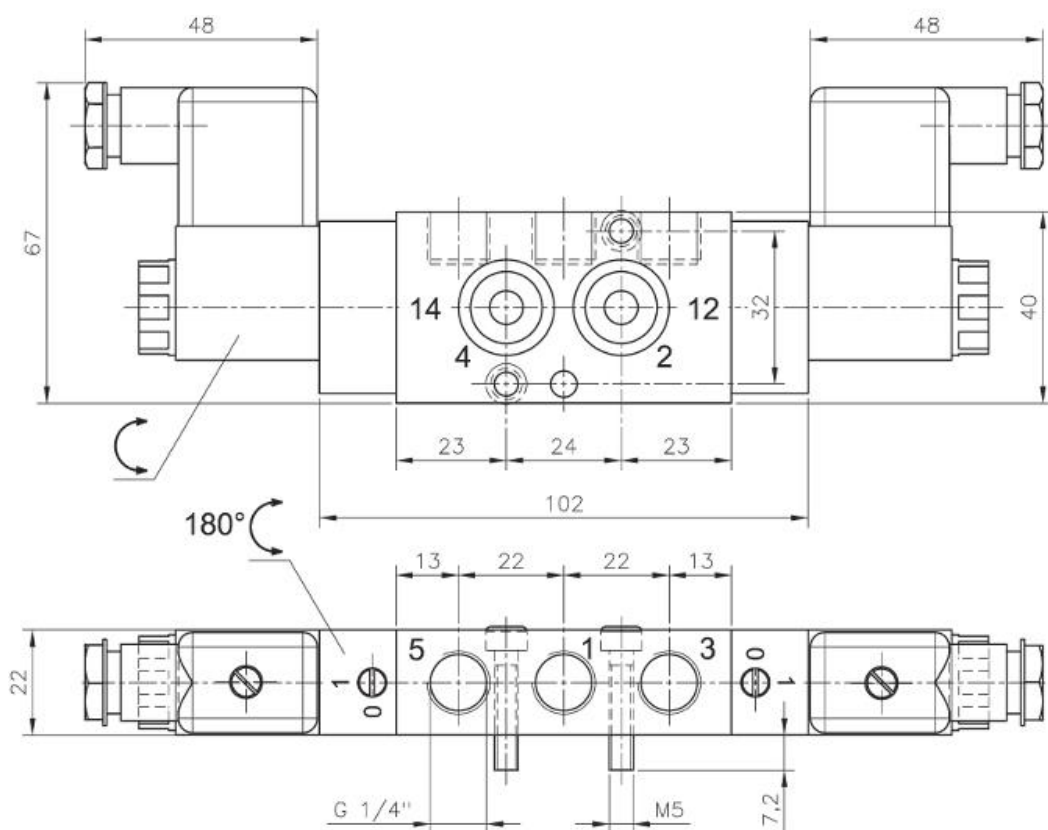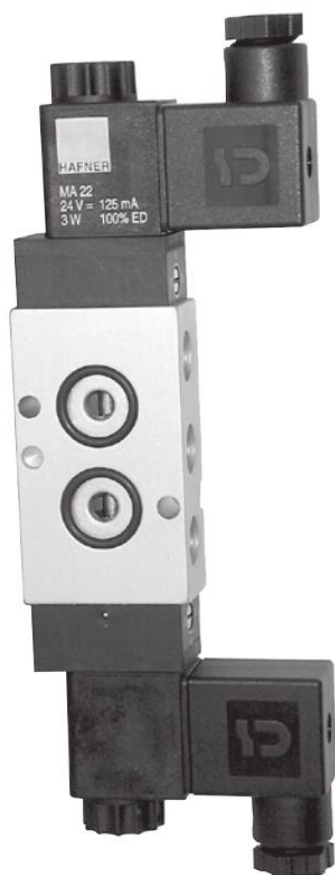

Type	Port size	Air flow	Operating press.	Power cons.	Weight	
MNH 520 701	G 1/4"	1250 l/min	1,5 - 10 bar	3W=5VA~	0,35 kg	Ex,*
MNH 520 701 NPT	G 1/4" NPT	1250 l/min	1,5 - 10 bar	3W=5VA~	0,35 kg	
MNH 520 121	G 1/2"	3000 l/min	1,5 - 10 bar	3W=5VA~	0,87 kg	Ex
MNH 520 121 NPT	G 1/2" NPT	3000 l/min	2,5 - 10 bar	3W=5VA~	0,87 kg	